


SM0510



Magnetic-inductive flow meter

SMR21XGXFRKG/US

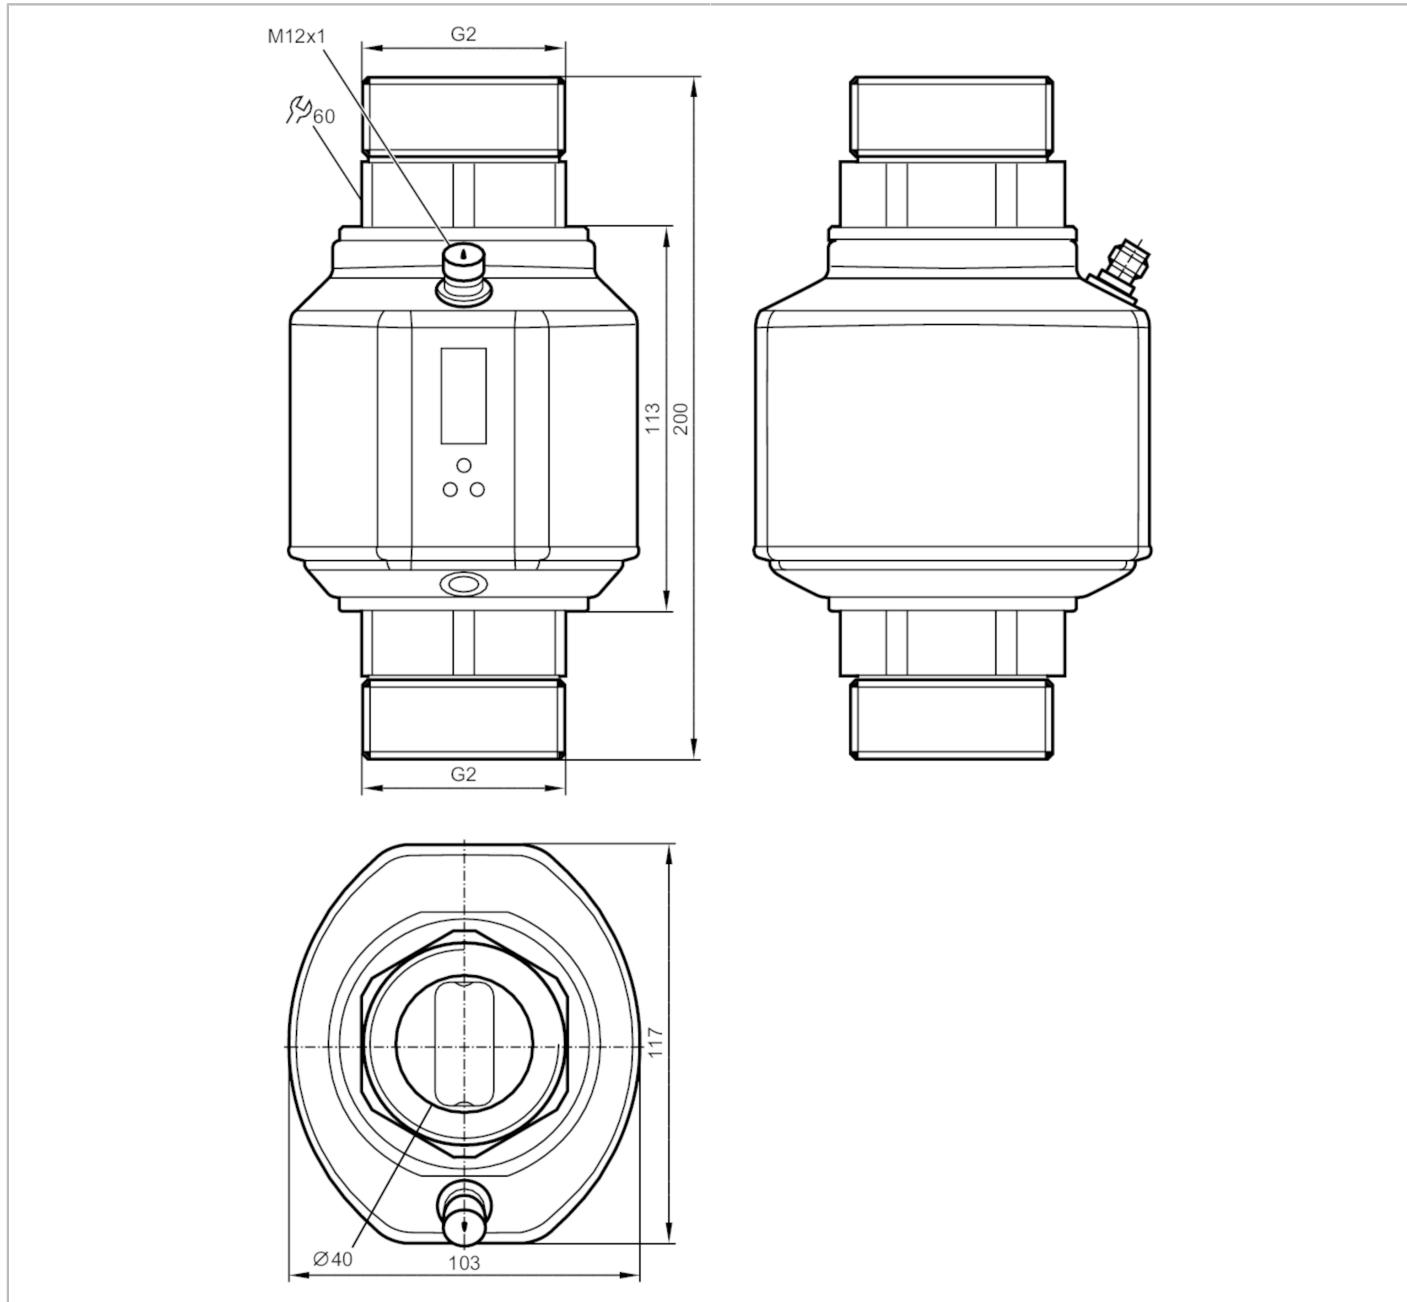

IO-Link

Product characteristics

Number of inputs and outputs	Number of digital outputs: 2; Number of analogue outputs: 1	
Measuring range	5...900 l/min	0.3...54 m ³ /h
Process connection	threaded connection G 2 DN50 flat seal	

SM0510



Magnetic-inductive flow meter

SMR21XGXFRKG/US

Application		
Special feature		Gold-plated contacts
Application		totaliser function; empty pipe detection; for industrial applications
Installation		connection to pipe by means of an adapter
Media		conductive liquids; water; hydrous media
Note on media		conductivity: $\geq 20 \mu\text{S}/\text{cm}$ viscosity: $< 70 \text{ mm}^2/\text{s}$ (40°C)
Medium temperature	[°C]	-10...70
Pressure rating	[bar]	16
Pressure rating	[Mpa]	1.6
Electrical data		
Operating voltage	[V]	18...32 DC; (according to EN 50178 SELV/PELV)
Current consumption	[mA]	< 150
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	5
Inputs / outputs		
Number of inputs and outputs		Number of digital outputs: 2; Number of analogue outputs: 1
Inputs		
Inputs		counter reset
Outputs		
Total number of outputs		2
Output signal		switching signal; analogue signal; pulse signal; frequency signal; IO-Link; (configurable)
Electrical design		PNP/NPN
Number of digital outputs		2
Output function		normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC	[V]	2
Permanent current rating of switching output DC	[mA]	250; (per output)
Number of analogue outputs		1
Analogue current output	[mA]	4...20; (scalable)
Max. load	[Ω]	500
Analogue voltage output	[V]	0...10; (scalable)
Min. load resistance	[Ω]	2000
Pulse output		flow rate meter
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Frequency of the output	[Hz]	0.1...10000

SM0510



Magnetic-inductive flow meter

SMR21XGXFRKG/US

Measuring/setting range				
Measuring range	5...900 l/min	0.3...54 m ³ /h		
Display range	-920...920 l/min	-55.2...55.2 m ³ /h		
Resolution	1 l/min	0.05 m ³ /h		
Set point SP	10...900 l/min	0.55...54 m ³ /h		
Reset point rP	5...896 l/min	0.3...53.75 m ³ /h		
Analogue start point ASP	0...720 l/min	0...43.2 m ³ /h		
Analogue end point AEP	180...900 l/min	10.8...54 m ³ /h		
Low flow cut-off LFC	< 15 l/min	< 0.9 m ³ /h		
In steps of	1 l/min	0.05 m ³ /h		
Measuring dynamics	1:180			
Volumetric flow quantity monitoring				
Pulse value	0.1 l...600 × 10 ³ m ³			
In steps of	0.1 l			
Pulse length [s]	0.003...2			
Temperature monitoring				
Measuring range [°C]	-20...80			
Display range [°C]	-40...100			
Resolution [°C]	0.2			
Set point SP [°C]	-19.2...80			
Reset point rP [°C]	-19.6...79.6			
Analogue start point [°C]	-20...60			
Analogue end point [°C]	0...80			
In steps of [°C]	0.2			
Accuracy / deviations				
Flow monitoring				
Accuracy (in the measuring range)	± (0,8 % MW + 0,5 % MEW)			
Repeatability	± 0,2% MEW			
Temperature monitoring				
Temperature drift	± 0,0333 °C / K			
Accuracy [K]	± 1 (bei 25 °C, Q > 15 l/min)			
Response times				
Flow monitoring				
Response time [s]	0.35; (dAP = 0)			
Delay time programmable dS, dr [s]	0...50			
Damping for the switching output dAP [s]	0...5			
Temperature monitoring				
Dynamic response T05 / T09 [s]	T09 = 3 (Q > 15 l/min)			
Software / programming				
Parameter setting options	Flow monitoring; quantity meter; Preset counter; Temperature monitoring; hysteresis / window; normally open / normally closed; switching logic; current/voltage/frequency/pulse output; start-up delay; display can be deactivated; Display unit; empty pipe detection			

SM0510



Magnetic-inductive flow meter

SMR21XGXRKG/US

Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9 CDV
Profiles		Smart Sensor: Process Data Variable; Device Identification
SIO mode		yes
Required master port type		A
Process data analogue		3
Process data binary		2
Min. process cycle time [ms]		5
Supported DeviceIDs	Type of operation	DeviceID
	Default	509
Operating conditions		
Ambient temperature [°C]		-10...60
Storage temperature [°C]		-25...80
Protection		IP 65; IP 67
Tests / approvals		
EMC	DIN EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	DIN EN 61000-4-3 HF radiated	10 V/m
	DIN EN 61000-4-4 Burst	2 kV
	DIN EN 61000-4-5 Surge	1 kV
	DIN EN 61000-4-6 HF conducted	10 V
	model number	004MI
CPA approval	accuracy class	-
	maximum allowable error	± 1,5 % FS
	Q (min)	0,3 m³/h
	Q (t)	-
	Q (max)	54 m³/h
	DIN EN 60068-2-27	20 g (11 ms)
Shock resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
Vibration resistance		
MTTF [years]		77.9
UL approval	UL Approval no.	I008
	File number UL	E174189
Pressure Equipment Directive	Sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	
Mechanical data		
Weight [g]		3212
Materials	stainless steel (1.4404 / 316L); stainless steel (1.4571/316Ti); PC; FKM; PBT-GF20; TPE-U	
Materials (wetted parts)	stainless steel (1.4404 / 316L); stainless steel (1.4571/316Ti); PEEK; Centellen; FKM	
Process connection	threaded connection G 2 DN50 flat seal	
Displays / operating elements		
Display	Display unit	6 x LED, green (l/min, m³/h, l, m³, 10³, °C)
	switching status	2 x LED, yellow
	measured values	alphanumeric display, 4-digit
	programming	alphanumeric display, 4-digit

SM0510



Magnetic-inductive flow meter

SMR21XGXFRKG/US

Accessories


Items supplied	sealings: 2, Centellen Label
----------------	---------------------------------

Remarks


Remarks	MW = measured value MEW = Final value of the measuring range
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; Contacts: gold-plated




Connection

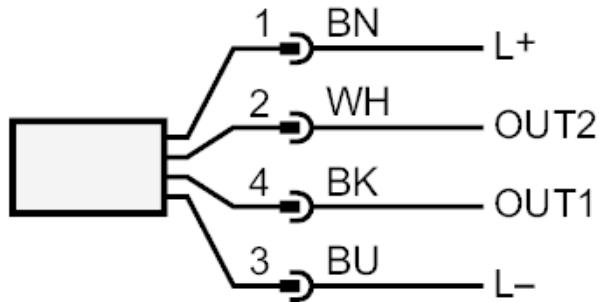

colours to DIN EN 60947-5-2

- OUT1:
switching output empty pipe detection
switching output volumetric flow quantity monitoring
frequency output volumetric flow quantity monitoring
Pulse output quantity meter
signal output Preset counter
IO-Link
- OUT2:
switching output empty pipe detection
switching output volumetric flow quantity monitoring
switching output Temperature monitoring
analogue output volumetric flow quantity monitoring
analogue output Temperature monitoring
input counter reset
- Core colours :
- | | |
|------|-------|
| BK = | black |
| BN = | brown |
| BU = | blue |
| WH = | white |

SM0510




Magnetic-inductive flow meter

SMR21XGXFRKG/US

Diagrams and graphs

Pressure loss


dP [mbar] DN50

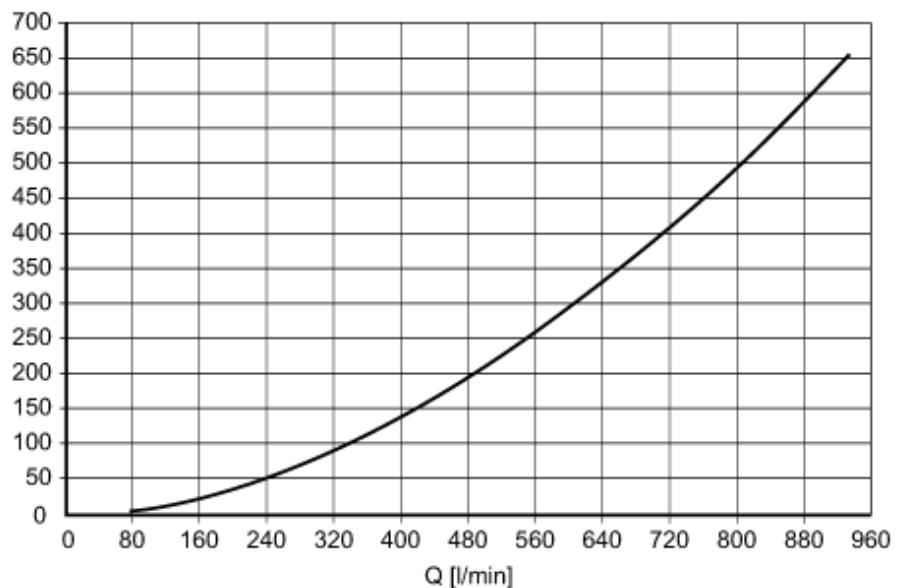

dP Pressure loss

Q volumetric flow quantity

Cavitation

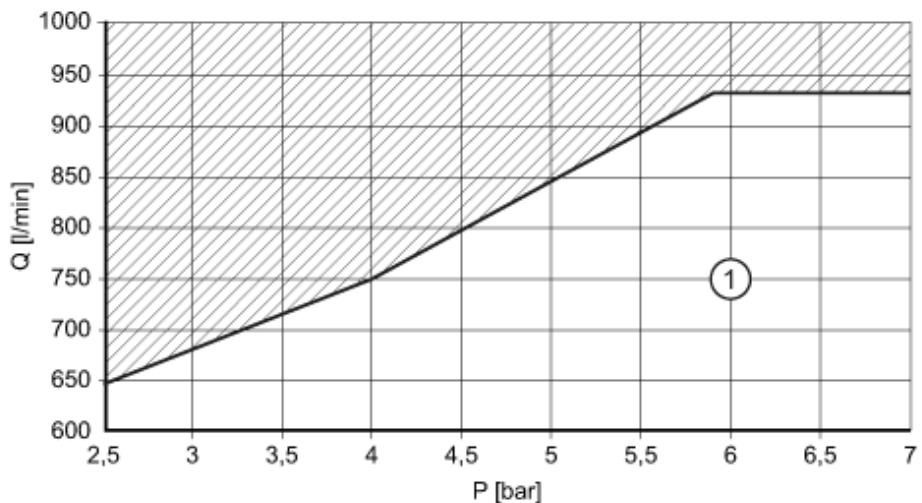

1 cavitation-free working area see operating instructions